




PRODUCT NAME : 1N756 8.2V 400mW Zener Diodes (Pack of 5)

PRICE : Rs 20.00

SKU : RM1771



(Pack of 5)

DESCRIPTION

NOTE THE PRODUCT NAME OF CAPTIONS TO BE MAINTAINED CAREFULLY. Copyrights by Robomart.com

A diode is a two-terminal electronic component with asymmetric conductance; it has low resistance to current in one direction, and high resistance in the other direction.

Features

- Nominal Zener Voltage (V_z): 8.2V
- Maximum Regulator Current (I_{zm}): 0.045A
- Max. Reverse Leakage Current (I_r): 0.1 μ A
- Forward Voltage Drop (V_f): 1.5V
- Total Power Dissipation (P_{tot}): 500mW

NEW PRODUCT

NEW PRODUCT


NEW PRODUCT

1N746 THRU 1N759

ZENER DIODES

FEATURES

- ◆ Silicon Planar Power Zener Diodes
- ◆ Standard Zener voltage tolerance is $\pm 5\%$ for "A" suffix. Other tolerances are available upon request.

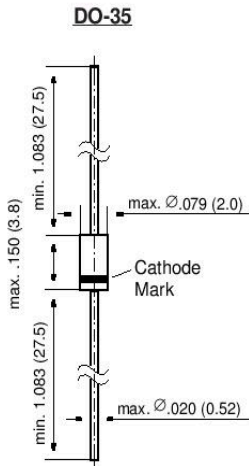

Dimensions are in inches and (millimeters)

MECHANICAL DATA

Case: DO-35 Glass Case

Weight: approx. 0.13 g

MAXIMUM RATINGS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Zener Current (see Table "Characteristics")			
Power Dissipation at $T_L = 75^\circ\text{C}$	P_{ot}	500 ⁽¹⁾	mW
Maximum Junction Temperature	T_j	175	°C
Storage Temperature Range	T_s	- 65 to +175	°C

NOTES:

(1) T_L is measured 3/8" from body.

	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance Junction to Ambient Air	R_{thJA}	-	-	300 ⁽¹⁾	°C/W
Forward Voltage at $I_F = 200\text{ mA}$	V_F	-	-	1.5	Volts

NOTES:

(1) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.

1N746 THRU 1N759

ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Type Number	Nominal Zener Voltage $V_Z @ I_{ZT}^{(3)}$ (Volts)	Test Current I_{ZT} (mA)	Maximum Zener Impedance $Z_{ZT} @ I_{ZT}^{(1)}$ (Ω)	Maximum Regulator Current $I_{ZM}^{(2)}$ (mA)	Maximum Reverse Leakage Current	
					$T_A = 25^\circ\text{C}$ $I_R @ V_R = 1\text{V}$ (μA)	$T_A = 150^\circ\text{C}$ $I_R @ V_R = 1\text{V}$ (μA)
1N746A	3.3	20	28	110	10	30
1N747A	3.6	20	24	100	10	30
1N748A	3.9	20	23	95	10	30
1N749A	4.3	20	22	85	2	30
1N750A	4.7	20	19	75	2	30
1N751A	5.1	20	17	70	1	20
1N752A	5.6	20	11	65	1	20
1N753A	6.2	20	7	60	0.1	20
1N754A	6.8	20	5	55	0.1	20
1N755A	7.5	20	6	50	0.1	20
1N756A	8.2	20	8	45	0.1	20
1N757A	9.1	20	10	40	0.1	20
1N758A	10	20	17	35	0.1	20
1N759A	12	20	30	30	0.1	20

NOTES:

- (1) The Zener Impedance is derived from the 1 KHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{ZT}) is superimposed on I_{ZT} . Zener Impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.
- (2) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.
- (3) Measured with device junction in thermal equilibrium.



