



PRODUCT NAME : EC103 0.8A 400V SCR

PRICE : Rs 35.00

SKU : RM1946



DESCRIPTION



SEE THE PRODUCT PAGE FOR MORE DETAILS. Copyrights by Robomart.com

Features

- Gate Turn-On Voltage (V_{gt}): 0.8V
- Peak Off-State Voltage(V_{drm}): 400V
- On-State Current (I_t): 0.8A
- Gate Current (I_{gt}): 12 μ A

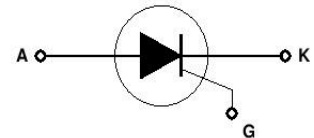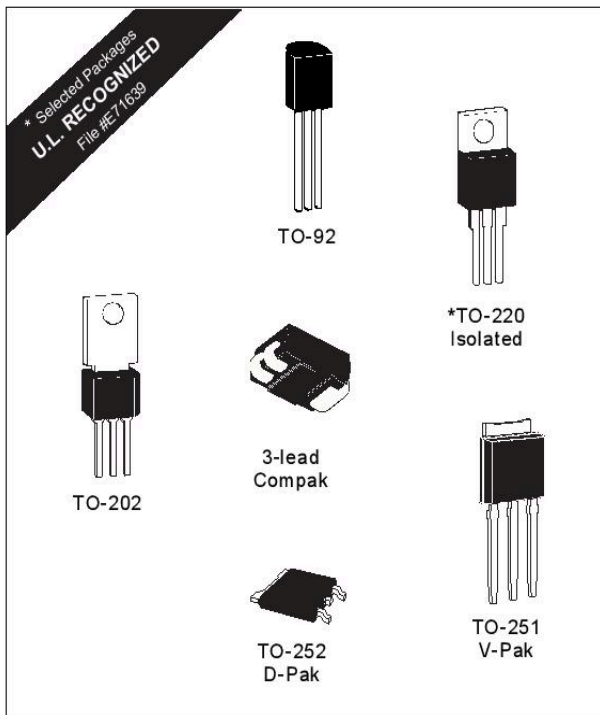

Sensitive SCRs

(0.8 A to 10 A) RoHS

General Description

The Teccor line of sensitive SCR semiconductors are half-wave unidirectional, gate-controlled rectifiers (SCR-thyristor) which complement Teccor's line of power SCRs. This group of packages offers ratings of 0.8 A to 10 A, and 200 V to 600 V with gate sensitivities of 12 μ A to 500 μ A. For gate currents in the 10 mA to 50 mA ranges, see "SCRs" section of this catalog.

The TO-220 and TO-92 are electrically isolated where the case or tab is internally isolated to allow the use of low-cost assembly and convenient packaging techniques.

Teccor's line of SCRs features glass-passivated junctions to ensure long-term device reliability and parameter stability. Teccor's glass offers a rugged, reliable barrier against junction contamination.

Tape-and-reel packaging is available for the TO-92 package. Consult the factory for more information.






Variations of devices covered in this data sheet are available for custom design applications. Consult the factory for more information.

Features

- RoHS Compliant
- Electrically-isolated TO-220 package
- High voltage capability — up to 600 V
- High surge capability — up to 100 A
- Glass-passivated chip

Compak Features

- Surface mount package — 0.8 A series
- New small-profile three-leaded Compak package
- Four gate sensitivities available
- Packaged in embossed carrier tape with 2,500 devices per reel
- Can replace SOT-223

TYPE	Part Number					I_T		V_{DRM} & V_{RRM}	I_{GT}	I_{DRM} & I_{RRM}			V_{TM}
	Non-isolated					(1)		Volts	(2) (12) (14) (18) μAmps	(20) (21)			(3) (10) Volts
	 TO-92	 TO-202	 TO-251 V-Pak	 Compak	 TO-252 D-Pak	$I_{T(RMS)}$	$I_{T(AV)}$			μAmps	T_C or $T_L = 25^\circ C$	T_C or $T_L = 100^\circ C$	
	See "Package Dimensions" section for variations. (11)					MAX	MIN	MAX	MAX			MAX	
0.8 A				S2S1		0.8	0.51	200	12	2		100	1.7
				S4S1		0.8	0.51	400	12	2		100	1.7
				S6S1		0.8	0.51	600	12	2		100	1.7
				S2S2		0.8	0.51	200	50	2		100	1.7
				S4S2		0.8	0.51	400	50	2		100	1.7
				S6S2		0.8	0.51	600	50	2		100	1.7
				S2S		0.8	0.51	200	200	2		100	1.7
				S4S		0.8	0.51	400	200	2		100	1.7
				S6S		0.8	0.51	600	200	2		100	1.7
				S2S3		0.8	0.51	200	500	2		100	1.7
				S4S3		0.8	0.51	400	500	2		100	1.7
				S6S3		0.8	0.51	600	500	2		100	1.7
						0.8	0.51	200	200	1	50		1.7
						0.8	0.51	400	200	1	50		1.7
						0.8	0.51	600	200	2	100		1.7
						0.8	0.51	200	12	1	50		1.7
						0.8	0.51	400	12	1	50		1.7
						0.8	0.51	600	12	2	100		1.7
						0.8	0.51	200	50	1	50		1.7
						0.8	0.51	400	50	1	50		1.7
						0.8	0.51	600	50	2	100		1.7
						0.8	0.51	200	500	1	50		1.7
						0.8	0.51	400	500	1	50		1.7
						0.8	0.51	600	500	2	100		1.7
					0.8	0.51	200	200	1		50	1.7	
					0.8	0.51	400	200	1		100	1.7	
1.5 A					1.5	0.95	200	200	1		100	1.5	
					1.5	0.95	400	200	1		100	1.5	
					1.5	0.95	600	200	2		100	1.5	
4 A					4	2.5	200	200	2		100	2.2	
					4	2.5	400	200	2		100	2.2	
					4	2.5	600	200	2		100	2.2	
					4	2.5	200	500	2		100	2.5	
					4	2.5	400	500	2		100	2.5	
					4	2.5	600	500	2		100	2.5	
					4	2.5	200	50	2		100	1.6	
					4	2.5	400	50	2		100	1.6	
					4	2.5	600	50	2		100	1.6	
					4	2.5	200	200	2		100	1.6	
					4	2.5	400	200	2		100	1.6	
					4	2.5	600	200	2		100	1.6	

See "General Notes" on page E5 - 4 and "Electrical Specifications Notes" on page E5 - 5

V _{GT} (4) (12) (22)			I _H (5) (15) (16) (19)	I _{GM} (17)	V _{GRM}	P _{GM} (17)	P _{G(AV)}	I _{TSM} (6) (7) (13)	dv/dt	di/dt	t _{gt} (8)	t _q (9)	I ² t
Volts			mAmps	Amps	Volts	Watts	Watts	Amps	Volts/μSec	Amps/μSec	μSec	μSec	Amps ² /Sec
T _C or T _L = -40 °C	T _C or T _L = 25 °C	T _C or T _L = 110 °C	MAX		MIN		60/50 Hz	MIN			TYP (23)	TYP	MAX
1.2	0.8	0.2	5	1	5	1	0.1	20/16	20	50	2	60	1.6
1.2	0.8	0.2	5	1	5	1	0.1	20/16	20	50	2	60	1.6
1.2	0.8	0.2	5	1	5	1	0.1	20/16	10	50	2	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	25	50	3	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	25	50	3	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	10	50	3	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	30	50	4	50	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	30	50	4	50	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	15	50	4	50	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	40	50	5	45	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	40	50	5	45	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	20	50	5	45	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	30	50	3.5	50	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	30	50	3.5	50	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	15	50	3.5	50	1.6
1.2	0.8	0.2	5	1	5	1	0.1	20/16	20	50	2	60	1.6
1.2	0.8	0.2	5	1	5	1	0.1	20/16	20	50	2	60	1.6
1.2	0.8	0.2	5	1	5	1	0.1	20/16	10	50	2	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	25	50	3	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	25	50	3	60	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	10	50	3	60	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	40	50	5	45	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	40	50	5	45	1.6
1.2	0.8	0.25	8	1	5	1	0.1	20/16	20	50	5	45	1.6
1.2	0.8	0.25	5	1	5	1	0.1	20/16	25	50	2.2	60	1.6
1.2	0.8	0.25	5	1	6	1	0.1	20/16	25	50	2.2	60	1.6
1	0.8	0.25	5	1	6	1	0.1	20/16	60	50	3.5	50	1.6
1	0.8	0.25	5	1	6	1	0.1	20/16	40	50	3.5	50	1.6
1	0.8	0.25	5	1	6	1	0.1	20/16	30	50	3.5	50	1.6
1	0.8	0.2	5	1	6	1	0.1	20/16	8	50	4	50	1.6
1	0.8	0.2	5	1	6	1	0.1	20/16	8	50	4	50	1.6
1	0.8	0.2	5	1	6	1	0.1	20/16	8	50	4	50	1.6
1	0.8	0.2	6	1	6	1	0.1	20/16	8	50	5	45	1.6
1	0.8	0.2	6	1	6	1	0.1	20/16	8	50	5	45	1.6
1	0.8	0.2	6	1	6	1	0.1	20/16	8	50	5	45	1.6
1	0.8	0.2	4	1	6	1	0.1	30/25	8	50	3	50	3.7
1	0.8	0.2	4	1	6	1	0.1	30/25	8	50	3	50	3.7
1	0.8	0.2	4	1	6	1	0.1	30/25	8	50	3	50	3.7
1	0.8	0.2	6	1	6	1	0.1	30/25	8	50	4	50	3.7
1	0.8	0.2	6	1	6	1	0.1	30/25	8	50	4	50	3.7
1	0.8	0.2	6	1	6	1	0.1	30/25	8	50	4	50	3.7

See "General Notes" on page E5 - 4 and "Electrical Specifications Notes" on page E5 - 5

