



PRODUCT NAME : 74LS244 Octal 3-Stat
 e Buffer/Line Driver/Line Recei
 ver


PRICE : Rs 50.00
SKU : RM0050



DESCRIPTION

74LS244 is Octal Buffer and Line Driver designed to be employed as memory address drivers, clock drivers and bus-oriented transmitters/receivers which provide improved PC board density.

Images/Pinout of 74LS244 Octal 3-State Buffer/Line Driver/Line Receiver

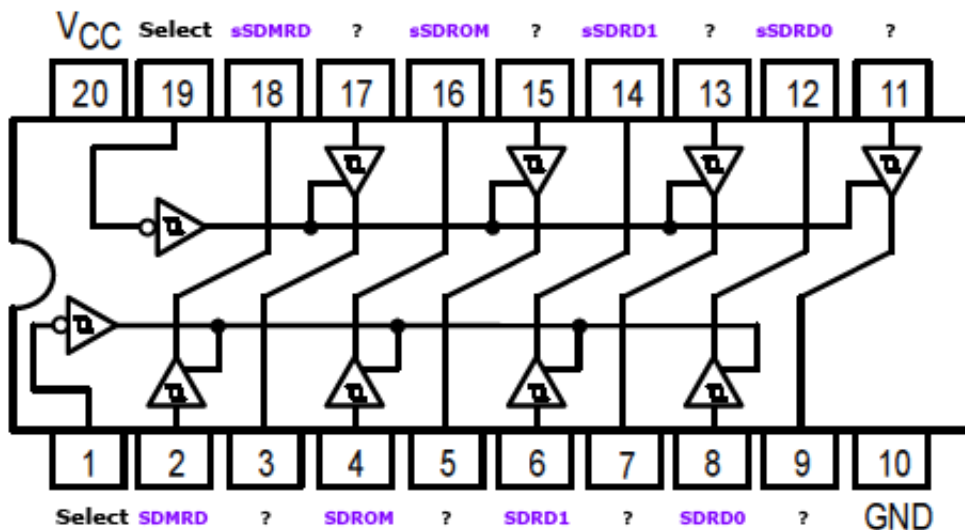

1G Enable	1	20	VCC
1A1 Input	2	19	2G Enable
2Y4 Output	3	18	1Y1 Output
1A2 Input	4	17	2A4 Input
2Y3 Output	5	16	1Y2 Output
1A3 Input	6	15	2A3 Input
2Y2 Output	7	14	1Y3 Output
1A4 Input	8	13	2A2 Input
2Y1 Output	9	12	1Y4 Output
Ground	10	11	2A1 Input

Features of 74LS244 Octal 3-State Buffer/Line Driver/Line Receiver:

- Operating Voltage Range 4.5V to 5V up to a maximum of 5.5V.
- Operating Temperature range : -55°C to +125°C.
- VH (Output High): 2.7V to 3.4V.
- VL (Output Low): 0.36V to 0.5V.

- Power Consumption: 3.3mA to 3.8mA.
- Operating Speed (Mhz):600-800.

Applications of 74LS244 Octal 3-State Buffer/Line Driver/Line Receiver:

- Logical Decision making.
- Circuits involving conditional operations.
- DIY projects for various logic gates based applications

ADDITIONAL IMAGES

